





M8 Connector Harness

With Open End

Product drawing	Product size	Pins Assignment
		

Material and Length		Male head3core	Male head4core	Female head3core	Female head4core	Common spare parts
PVC	black3m	M8-M03T-3.0PVC/BK	M8-M04T-3.0PVC/BK	M8-F03T-3.0PVC/BK	M8-F04T-3.0PVC/BK	
PVC	black5m	M8-M03T-5.0PVC/BK	M8-M04T-5.0PVC/BK	M8-F03T-5.0PVC/BK	M8-F04T-5.0PVC/BK	
PVC	black10m	M8-M03T-10.0PVC/BK	M8-M04T-10.0PVC/BK	M8-F03T-10.0PVC/BK	M8-F04T-10.0PVC/BK	
PUR	black3m	M8-M03T-3.0PUR/BK	M8-M04T-3.0PUR/BK	M8-F03T-3.0PUR/BK	M8-F04T-3.0PUR/BK	
PUR	black5m	M8-M03T-5.0PUR/BK	M8-M04T-5.0PUR/BK	M8-F03T-5.0PUR/BK	M8-F04T-5.0PUR/BK	
PUR	black10m	M8-M03T-10.0PUR/BK	M8-M04T-10.0PUR/BK	M8-F03T-10.0PUR/BK	M8-F04T-10.0PUR/BK	
Towchain	black3m	M8-M03T-3.0TL/BK	M8-M04T-3.0TL/BK	M8-F03T-3.0TL/BK	M8-F04T-3.0TL/BK	
Towchain	black5m	M8-M03T-5.0TL/BK	M8-M04T-5.0TL/BK	M8-F03T-5.0TL/BK	M8-F04T-5.0TL/BK	
Towchain	black10m	M8-M03T-10.0TL/BK	M8-M04T-10.0TL/BK	M8-F03T-10.0TL/BK	M8-F04T-10.0TL/BK	
Anti-Welding	orange 3m	M8-M03T-3.0FH/OG	M8-M04T-3.0FH/OG	M8-F03T-3.0FH/OG	M8-F04T-3.0FH/OG	
Anti-Welding	orange 5m	M8-M03T-5.0FH/OG	M8-M04T-5.0FH/OG	M8-F03T-5.0FH/OG	M8-F04T-5.0FH/OG	
Anti-Welding	orange 10m	M8-M03T-10.0FH/OG	M8-M04T-10.0FH/OG	M8-F03T-10.0FH/OG	M8-F04T-10.0FH/OG	
Grey cable	GY					

With Open End

Product drawing	Product size	Pins Assignment
		

Material and Length		Male head3core	Male head4core	Female head3core	Female head4core	Common spare parts
PVC	black3m	M8-M03S-3.0PVC/BK	M8-M04S-3.0PVC/BK	M8-F03S-3.0PVC/BK	M8-F04S-3.0PVC/BK	
PVC	black5m	M8-M03S-5.0PVC/BK	M8-M04S-5.0PVC/BK	M8-F03S-5.0PVC/BK	M8-F04S-5.0PVC/BK	
PVC	black10m	M8-M03S-10.0PVC/BK	M8-M04S-10.0PVC/BK	M8-F03S-10.0PVC/BK	M8-F04S-10.0PVC/BK	
PUR	black3m	M8-M03S-3.0PUR/BK	M8-M04S-3.0PUR/BK	M8-F03S-3.0PUR/BK	M8-F04S-3.0PUR/BK	
PUR	black5m	M8-M03S-5.0PUR/BK	M8-M04S-5.0PUR/BK	M8-F03S-5.0PUR/BK	M8-F04S-5.0PUR/BK	
PUR	black10m	M8-M03S-10.0PUR/BK	M8-M04S-10.0PUR/BK	M8-F03S-10.0PUR/BK	M8-F04S-10.0PUR/BK	
Towchain	black3m	M8-M03S-3.0TL/BK	M8-M04S-3.0TL/BK	M8-F03S-3.0TL/BK	M8-F04S-3.0TL/BK	
Towchain	black5m	M8-M03S-5.0TL/BK	M8-M04S-5.0TL/BK	M8-F03S-5.0TL/BK	M8-F04S-5.0TL/BK	
Towchain	black10m	M8-M03S-10.0TL/BK	M8-M04S-10.0TL/BK	M8-F03S-10.0TL/BK	M8-F04S-10.0TL/BK	
Anti-Welding	orange3m	M8-M03S-3.0FH/OG	M8-M04S-3.0FH/OG	M8-F03S-3.0FH/OG	M8-F04S-3.0FH/OG	
Anti-Welding	orange5m	M8-M03S-5.0FH/OG	M8-M04S-5.0FH/OG	M8-F03S-5.0FH/OG	M8-F04S-5.0FH/OG	
Anti-Welding	orange10m	M8-M03S-10.0FH/OG	M8-M04S-10.0FH/OG	M8-F03S-10.0FH/OG	M8-F04S-10.0FH/OG	
Grey cable	GY					

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm²	4*0.25mm²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM



ISO 9001 (2015) quality management system

M8 Connector Harness

With Open End



Product drawing	Product size	Pins Assignment

Material and Length		Female head3core	Female head4core	Female head3core	Female head4core
PVC	black3m	M8-F03T-LED-3.0PVC/BK	M8-F04T-LED-3.0PVC/BK	M8-F03S-LED-3.0PVC/BK	M8-F04S-LED-3.0PVC/BK
PVC	black5m	M8-F03T-LED-5.0PVC/BK	M8-F04T-LED-5.0PVC/BK	M8-F03S-LED-5.0PVC/BK	M8-F04S-LED-5.0PVC/BK
PVC	black10m	M8-F03T-LED-10.0PVC/BK	M8-F04T-LED-10.0PVC/BK	M8-F03S-LED-10.0PVC/BK	M8-F04S-LED-10.0PVC/BK
PUR	black3m	M8-F03T-LED-3.0PUR/BK	M8-F04T-LED-3.0PUR/BK	M8-F03S-LED-3.0PUR/BK	M8-F04S-LED-3.0PUR/BK
PUR	black5m	M8-F03T-LED-5.0PUR/BK	M8-F04T-LED-5.0PUR/BK	M8-F03S-LED-5.0PUR/BK	M8-F04S-LED-5.0PUR/BK
PUR	black10m	M8-F03T-LED-10.0PUR/BK	M8-F04T-LED-10.0PUR/BK	M8-F03S-LED-10.0PUR/BK	M8-F04S-LED-10.0PUR/BK
Towchain	black3m	M8-F03T-LED-3.0TL/BK	M8-F04T-LED-3.0TL/BK	M8-F03S-LED-3.0TL/BK	M8-F04S-LED-3.0TL/BK
Towchain	black5m	M8-F03T-LED-5.0TL/BK	M8-F04T-LED-5.0TL/BK	M8-F03S-LED-5.0TL/BK	M8-F04S-LED-5.0TL/BK
Towchain	black10m	M8-F03T-LED-10.0TL/BK	M8-F04T-LED-10.0TL/BK	M8-F03S-LED-10.0TL/BK	M8-F04S-LED-10.0TL/BK
Anti-Welding	orange3m	M8-F03T-LED-3.0FH/OG	M8-F04T-LED-3.0FH/OG	M8-F03S-LED-3.0FH/OG	M8-F04S-LED-3.0FH/OG
Anti-Welding	orange5m	M8-F03T-LED-5.0FH/OG	M8-F04T-LED-5.0FH/OG	M8-F03S-LED-5.0FH/OG	M8-F04S-LED-5.0FH/OG
Anti-Welding	orange10m	M8-F03T-LED-10.0FH/OG	M8-F04T-LED-10.0FH/OG	M8-F03S-LED-10.0FH/OG	M8-F04S-LED-10.0FH/OG
Grey cable		GY			

With Open End



Product drawing	Product size	Pins Assignment

Material and Length		Male head3core	Male head4core	Female head3core	Female head4core	Common spare parts
PVC	black3m	M8P-M03T-3.0PVC/BK	M8P-M04T-3.0PVC/BK	M8P-F03T-3.0PVC/BK	M8P-F04T-3.0PVC/BK	
PVC	black5m	M8P-M03T-5.0PVC/BK	M8P-M04T-5.0PVC/BK	M8P-F03T-5.0PVC/BK	M8P-F04T-5.0PVC/BK	
PVC	black10m	M8P-M03T-10.0PVC/BK	M8P-M04T-10.0PVC/BK	M8P-F03T-10.0PVC/BK	M8P-F04T-10.0PVC/BK	
PUR	black3m	M8P-M03T-3.0PUR/BK	M8P-M04T-3.0PUR/BK	M8P-F03T-3.0PUR/BK	M8P-F04T-3.0PUR/BK	
PUR	black5m	M8P-M03T-5.0PUR/BK	M8P-M04T-5.0PUR/BK	M8P-F03T-5.0PUR/BK	M8P-F04T-5.0PUR/BK	
PUR	black10m	M8P-M03T-10.0PUR/BK	M8P-M04T-10.0PUR/BK	M8P-F03T-10.0PUR/BK	M8P-F04T-10.0PUR/BK	
Towchain	black3m	M8P-M03T-3.0TL/BK	M8P-M04T-3.0TL/BK	M8P-F03T-3.0TL/BK	M8P-F04T-3.0TL/BK	
Towchain	black5m	M8P-M03T-5.0TL/BK	M8P-M04T-5.0TL/BK	M8P-F03T-5.0TL/BK	M8P-F04T-5.0TL/BK	
Towchain	black10m	M8P-M03T-10.0TL/BK	M8P-M04T-10.0TL/BK	M8P-F03T-10.0TL/BK	M8P-F04T-10.0TL/BK	
Anti-Welding	orange3m	M8P-M03T-3.0FH/OG	M8P-M04T-3.0FH/OG	M8P-F03T-3.0FH/OG	M8P-F04T-3.0FH/OG	
Anti-Welding	orange5m	M8P-M03T-5.0FH/OG	M8P-M04T-5.0FH/OG	M8P-F03T-5.0FH/OG	M8P-F04T-5.0FH/OG	
Anti-Welding	orange10m	M8P-M03T-10.0FH/OG	M8P-M04T-10.0FH/OG	M8P-F03T-10.0FH/OG	M8P-F04T-10.0FH/OG	
Grey cable		GY				

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali

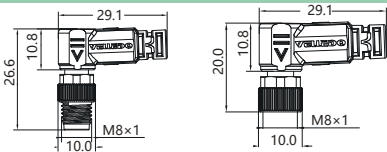

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



M8 Connector Harness



With Open End

Shield

Product drawing	Product size	Pins Assignment
		

Material and Length		Male head3core	Male head4core	Female head3core	Female head4core	Common spare parts
PVC	black3m	M8P-M03S-3.0PVC/BK	M8P-M04S-3.0PVC/BK	M8P-F03S-3.0PVC/BK	M8P-F04S-3.0PVC/BK	
PVC	black5m	M8P-M03S-5.0PVC/BK	M8P-M04S-5.0PVC/BK	M8P-F03S-5.0PVC/BK	M8P-F04S-5.0PVC/BK	
PVC	black10m	M8P-M03S-10.0PVC/BK	M8P-M04S-10.0PVC/BK	M8P-F03S-10.0PVC/BK	M8P-F04S-10.0PVC/BK	
PUR	black3m	M8P-M03S-3.0PUR/BK	M8P-M04S-3.0PUR/BK	M8P-F03S-3.0PUR/BK	M8P-F04S-3.0PUR/BK	
PUR	black5m	M8P-M03S-5.0PUR/BK	M8P-M04S-5.0PUR/BK	M8P-F03S-5.0PUR/BK	M8P-F04S-5.0PUR/BK	
PUR	black10m	M8P-M03S-10.0PUR/BK	M8P-M04S-10.0PUR/BK	M8P-F03S-10.0PUR/BK	M8P-F04S-10.0PUR/BK	
Towchain	black3m	M8P-M03S-3.0TL/BK	M8P-M04S-3.0TL/BK	M8P-F03S-3.0TL/BK	M8P-F04S-3.0TL/BK	
Towchain	black5m	M8P-M03S-5.0TL/BK	M8P-M04S-5.0TL/BK	M8P-F03S-5.0TL/BK	M8P-F04S-5.0TL/BK	
Towchain	black10m	M8P-M03S-10.0TL/BK	M8P-M04S-10.0TL/BK	M8P-F03S-10.0TL/BK	M8P-F04S-10.0TL/BK	
Anti-Welding	orange3m	M8P-M03S-3.0FH/OG	M8P-M04S-3.0FH/OG	M8P-F03S-3.0FH/OG	M8P-F04S-3.0FH/OG	
Anti-Welding	orange5m	M8P-M03S-5.0FH/OG	M8P-M04S-5.0FH/OG	M8P-F03S-5.0FH/OG	M8P-F04S-5.0FH/OG	
Anti-Welding	orange10m	M8P-M03S-10.0FH/OG	M8P-M04S-10.0FH/OG	M8P-F03S-10.0FH/OG	M8P-F04S-10.0FH/OG	
Grey cable	GY					

Double end pre cast wire harness

Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core
PVC	black3m	M8-M03T/F03T-3.0PVC/BK	M8-M04T/F04T-3.0PVC/BK
PVC	black5m	M8-M03T/F03T-5.0PVC/BK	M8-M04T/F04T-5.0PVC/BK
PVC	black10m	M8-M03T/F03T-10.0PVC/BK	M8-M04T/F04T-10.0PVC
PUR	black3m	M8-M03T/F03T-3.0PUR/BK	M8-M04T/F04T-3.0PUR/BK
PUR	black5m	M8-M03T/F03T-5.0PUR/BK	M8-M04T/F04T-5.0PUR/BK
PUR	black10m	M8-M03T/F03T-10.0PUR/BK	M8-M04T/F04T-10.0PUR/BK
Towchain	black3m	M8-M03T/F03T-3.0TL/BK	M8-M04T/F04T-3.0TL/BK
Towchain	black5m	M8-M03T/F03T-5.0TL/BK	M8-M04T/F04T-5.0TL/BK
Towchain	black10m	M8-M03T/F03T-10.0TL/BK	M8-M04T/F04T-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/F03T-3.0FH/OG	M8-M04T/F04T-3.0FH/OG
Anti-Welding	orange5m	M8-M03T/F03T-5.0FH/OG	M8-M04T/F04T-5.0FH/OG
Anti-Welding	orange10m	M8-M03T/F03T-10.0FH/OG	M8-M04T/F04T-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali



Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM

M8 Connector Harness



Double end pre cast wire harness

Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core
PVC	black3m	M8-M03T/M03S-3.0PVC/BK	M8-M04T/M04S-3.0PVC/BK
PVC	black5m	M8-M03T/M03S-5.0PVC/BK	M8-M04T/M04S-5.0PVC/BK
PVC	black10m	M8-M03T/M03S-10.0PVC/BK	M8-M04T/M04S-10.0PVC/BK
PUR	black3m	M8-M03T/M03S-3.0PUR/BK	M8-M04T/M04S-3.0PUR/BK
PUR	black5m	M8-M03T/M03S-5.0PUR/BK	M8-M04T/M04S-5.0PUR/BK
PUR	black10m	M8-M03T/M03S-10.0PUR/BK	M8-M04T/M04S-10.0PUR/BK
Towchain	black3m	M8-M03T/M03S-3.0TL/BK	M8-M04T/M04S-3.0TL/BK
Towchain	black5m	M8-M03T/M03S-5.0TL/BK	M8-M04T/M04S-5.0TL/BK
Towchain	black10m	M8-M03T/M03S-10.0TL/BK	M8-M04T/M04S-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/M03S-3.0FH/OG	M8-M04T/M04S-3.0FH/OG
Anti-Welding	orange5m	M8-M03T/M03S-5.0FH/OG	M8-M04T/M04S-5.0FH/OG
Anti-Welding	orange10m	M8-M03T/M03S-10.0FH/OG	M8-M04T/M04S-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core
PVC	black3m	M8-M03T/F03T-LED-3.0PVC/BK	M8-M04T/F04T-LED-3.0PVC/BK
PVC	black5m	M8-M03T/F03T-LED-5.0PVC/BK	M8-M04T/F04T-LED-5.0PVC/BK
PVC	black10m	M8-M03T/F03T-LED-10.0PVC/BK	M8-M04T/F04T-LED-10.0PVC/BK
PUR	black3m	M8-M03T/F03T-LED-3.0PUR/BK	M8-M04T/F04T-LED-3.0PUR/BK
PUR	black5m	M8-M03T/F03T-LED-5.0PUR/BK	M8-M04T/F04T-LED-5.0PUR/BK
PUR	black10m	M8-M03T/F03T-LED-10.0PUR/BK	M8-M04T/F04T-LED-10.0PUR/BK
Towchain	black3m	M8-M03T/F03T-LED-3.0TL/BK	M8-M04T/F04T-LED-3.0TL/BK
Towchain	black5m	M8-M03T/F03T-LED-5.0TL/BK	M8-M04T/F04T-LED-5.0TL/BK
Towchain	black10m	M8-M03T/F03T-LED-10.0TL/BK	M8-M04T/F04T-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/F03T-LED-3.0FH/OG	M8-M04T/F04T-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03T/F03T-LED-5.0FH/OG	M8-M04T/F04T-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03T/F03T-LED-10.0FH/OG	M8-M04T/F04T-LED-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm²	4*0.25mm²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



M8 Connector Harness

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03T/F03S-LED-3.0PVC/BK	M8-M04T/F04S-LED-3.0PVC/BK
PVC	black5m	M8-M03T/F03S-LED-5.0PVC/BK	M8-M04T/F04S-LED-5.0PVC/BK
PVC	black10m	M8-M03T/F03S-LED-10.0PVC/BK	M8-M04T/F04S-LED-10.0PVC/BK
PUR	black3m	M8-M03T/F03S-LED-3.0PUR/BK	M8-M04T/F04S-LED-3.0PUR/BK
PUR	black5m	M8-M03T/F03S-LED-5.0PUR/BK	M8-M04T/F04S-LED-5.0PUR/BK
PUR	black10m	M8-M03T/F03S-LED-10.0PUR/BK	M8-M04T/F04S-LED-10.0PUR/BK
Towchain	black3m	M8-M03T/F03S-LED-3.0TL/BK	M8-M04T/F04S-LED-3.0TL/BK
Towchain	black5m	M8-M03T/F03S-LED-5.0TL/BK	M8-M04T/F04S-LED-5.0TL/BK
Towchain	black10m	M8-M03T/F03S-LED-10.0TL/BK	M8-M04T/F04S-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/F03S-LED-3.0FH/OG	M8-M04T/F04S-LED-5.0FH/OG
Anti-Welding	orange5m	M8-M03T/F03S-LED-5.0FH/OG	M8-M04T/F04S-LED-3.0FH/OG
Anti-Welding	orange10m	M8-M03T/F03S-LED-10.0FH/OG	M8-M04T/F04S-LED-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness

Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03S/F03S-3.0PVC/BK	M8-M04S/F04S-3.0PVC/BK
PVC	black5m	M8-M03S/F03S-5.0PVC/BK	M8-M04S/F04S-5.0PVC/BK
PVC	black10m	M8-M03S/F03S-10.0PVC/BK	M8-M04S/F04S-10.0PVC/BK
PUR	black3m	M8-M03S/F03S-3.0PUR/BK	M8-M04S/F04S-3.0PUR/BK
PUR	black5m	M8-M03S/F03S-5.0PUR/BK	M8-M04S/F04S-5.0PUR/BK
PUR	black10m	M8-M03S/F03S-10.0PUR/BK	M8-M04S/F04S-10.0PUR/BK
Towchain	black3m	M8-M03S/F03S-3.0TL/BK	M8-M04S/F04S-3.0TL/BK
Towchain	black5m	M8-M03S/F03S-5.0TL/BK	M8-M04S/F04S-5.0TL/BK
Towchain	black10m	M8-M03S/F03S-10.0TL/BK	M8-M04S/F04S-10.0TL/BK
Anti-Welding	orange3m	M8-M03S/F03S-3.0FH/OG	M8-M04S/F04S-3.0FH/OG
Anti-Welding	orange5m	M8-M03S/F03S-5.0FH/OG	M8-M04S/F04S-5.0FH/OG
Anti-Welding	orange10m	M8-M03S/F03S-10.0FH/OG	M8-M04S/F04S-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm²	4*0.25mm²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM



ISO 9001 (2015) quality management system

M8 Connector Harness

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03S/F03T-LED-3.0PVC/BK	M8-M04S/F04T-LED-3.0PVC/BK
PVC	black5m	M8-M03S/F03T-LED-5.0PVC/BK	M8-M04S/F04T-LED-5.0PVC/BK
PVC	black10m	M8-M03S/F03T-LED-10.0PVC/BK	M8-M04S/F04T-LED-10.0PVC/BK
PUR	black3m	M8-M03S/F03T-LED-3.0PUR/BK	M8-M04S/F04T-LED-3.0PUR/BK
PUR	black5m	M8-M03S/F03T-LED-5.0PUR/BK	M8-M04S/F04T-LED-5.0PUR/BK
PUR	black10m	M8-M03S/F03T-LED-10.0PUR/BK	M8-M04S/F04T-LED-10.0PUR/BK
Towchain	black3m	M8-M03S/F03T-LED-3.0TL/BK	M8-M04S/F04T-LED-3.0TL/BK
Towchain	black5m	M8-M03S/F03T-LED-5.0TL/BK	M8-M04S/F04T-LED-5.0TL/BK
Towchain	black10m	M8-M03S/F03T-LED-10.0TL/BK	M8-M04S/F04T-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03S/F03T-LED-3.0FH/OG	M8-M04S/F04T-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03S/F03T-LED-5.0FH/OG	M8-M04S/F04T-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03S/F03T-LED-10.0FH/OG	M8-M04S/F04T-LED-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03S/F03S-LED-3.0PVC/BK	M8-M04S/F04S-LED-3.0PVC/BK
PVC	black5m	M8-M03S/F03S-LED-5.0PVC/BK	M8-M04S/F04S-LED-5.0PVC/BK
PVC	black10m	M8-M03S/F03S-LED-10.0PVC/BK	M8-M04S/F04S-LED-10.0PVC/BK
PUR	black3m	M8-M03S/F03S-LED-3.0PUR/BK	M8-M04S/F04S-LED-3.0PUR/BK
PUR	black5m	M8-M03S/F03S-LED-5.0PUR/BK	M8-M04S/F04S-LED-5.0PUR/BK
PUR	black10m	M8-M03S/F03S-LED-10.0PUR/BK	M8-M04S/F04S-LED-10.0PUR/BK
Towchain	black3m	M8-M03S/F03S-LED-3.0TL/BK	M8-M04S/F04S-LED-3.0TL/BK
Towchain	black5m	M8-M03S/F03S-LED-5.0TL/BK	M8-M04S/F04S-LED-5.0TL/BK
Towchain	black10m	M8-M03S/F03S-LED-10.0TL/BK	M8-M04S/F04S-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03S/F03S-LED-3.0FH/OG	M8-M04S/F04S-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03S/F03S-LED-5.0FH/OG	M8-M04S/F04S-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03S/F03S-LED-10.0FH/OG	M8-M04S/F04S-LED-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali



Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



M8 Connector Harness

Double end pre cast wire harness



Shield

Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core
PVC	black3m	M8P-M03T/F03T-3.0PVC/BK	M8P-M04T/F04T-3.0PVC/BK
PVC	black5m	M8P-M03T/F03T-5.0PVC/BK	M8P-M04T/F04T-5.0PVC/BK
PVC	black10m	M8P-M03T/F03T-10.0PVC/BK	M8P-M04T/F04T-10.0PVC/BK
PUR	black3m	M8P-M03T/F03T-3.0PUR/BK	M8P-M04T/F04T-3.0PUR/BK
PUR	black5m	M8P-M03T/F03T-5.0PUR/BK	M8P-M04T/F04T-5.0PUR/BK
PUR	black10m	M8P-M03T/F03T-10.0PUR/BK	M8P-M04T/F04T-10.0PUR/BK
Towchain	black3m	M8P-M03T/F03T-3.0TL/BK	M8P-M04T/F04T-3.0TL/BK
Towchain	black5m	M8P-M03T/F03T-5.0TL/BK	M8P-M04T/F04T-5.0TL/BK
Towchain	black10m	M8P-M03T/F03T-10.0TL/BK	M8P-M04T/F04T-10.0TL/BK
Anti-Welding	orange3m	M8P-M03T/F03T-3.0FH/OG	M8P-M04T/F04T-3.0FH/OG
Anti-Welding	orange5m	M8P-M03T/F03T-5.0FH/OG	M8P-M04T/F04T-5.0FH/OG
Anti-Welding	orange10m	M8P-M03T/F03T-10.0FH/OG	M8P-M04T/F04T-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness

Shield

Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core
PVC	black3m	M8P-M03T/F03S-3.0PVC/BK	M8P-M04T/F04S-3.0PVC/BK
PVC	black5m	M8P-M03T/F03S-5.0PVC/BK	M8P-M04T/F04S-5.0PVC/BK
PVC	black10m	M8P-M03T/F03S-10.0PVC/BK	M8P-M04T/F04S-10.0PVC/BK
PUR	black3m	M8P-M03T/F03S-3.0PUR/BK	M8P-M04T/F04S-3.0PUR/BK
PUR	black5m	M8P-M03T/F03S-5.0PUR/BK	M8P-M04T/F04S-5.0PUR/BK
PUR	black10m	M8P-M03T/F03S-10.0PUR/BK	M8P-M04T/F04S-10.0PUR/BK
Towchain	black3m	M8P-M03T/F03S-3.0TL/BK	M8P-M04T/F04S-3.0TL/BK
Towchain	black5m	M8P-M03T/F03S-5.0TL/BK	M8P-M04T/F04S-5.0TL/BK
Towchain	black10m	M8P-M03T/F03S-10.0TL/BK	M8P-M04T/F04S-10.0TL/BK
Anti-Welding	orange3m	M8P-M03T/F03S-3.0FH/OG	M8P-M04T/F04S-3.0FH/OG
Anti-Welding	orange5m	M8P-M03T/F03S-5.0FH/OG	M8P-M04T/F04S-5.0FH/OG
Anti-Welding	orange10m	M8P-M03T/F03S-10.0FH/OG	M8P-M04T/F04S-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM



ISO 9001 (2015) quality management system

M8 Connector Harness

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment
Material and Length		
	3core	4core
PVC black3m	M8P-M03S/F03S-3.0PVC/BK	M8P-M04S/F04S-3.0PVC/BK
PVC black5m	M8P-M03S/F03S-5.0PVC/BK	M8P-M04S/F04S-5.0PVC/BK
PVC black10m	M8P-M03S/F03S-10.0PVC/BK	M8P-M04S/F04S-10.0PVC/BK
PUR black3m	M8P-M03S/F03S-3.0PUR/BK	M8P-M04S/F04S-3.0PUR/BK
PUR black5m	M8P-M03S/F03S-5.0PUR/BK	M8P-M04S/F04S-5.0PUR/BK
PUR black10m	M8P-M03S/F03S-10.0PUR/BK	M8P-M04S/F04S-10.0PUR/BK
Towchain black3m	M8P-M03S/F03S-3.0TL/BK	M8P-M04S/F04S-3.0TL/BK
Towchain black5m	M8P-M03S/F03S-5.0TL/BK	M8P-M04S/F04S-5.0TL/BK
Towchain black10m	M8P-M03S/F03S-10.0TL/BK	M8P-M04S/F04S-10.0TL/BK
Anti-Welding orange3m	M8P-M03S/F03S-3.0FH/OG	M8P-M04S/F04S-3.0FH/OG
Anti-Welding orange5m	M8P-M03S/F03S-5.0FH/OG	M8P-M04S/F04S-5.0FH/OG
Anti-Welding orange10m	M8P-M03S/F03S-10.0FH/OG	M8P-M04S/F04S-10.0FH/OG
Grey cable	GY	

Double end pre cast wire harness

Product drawing	Product size	Pins Assignment
Material and Length		
	3core	4core
PVC black3m	M8-M03T/M12-F03T-3.0PVC/BK	M8-M04T/M12-F04T-3.0PVC/BK
PVC black5m	M8-M03T/M12-F03T-5.0PVC/BK	M8-M04T/M12-F04T-5.0PVC/BK
PVC black10m	M8-M03T/M12-F03T-10.0PVC/BK	M8-M04T/M12-F04T-10.0PVC/BK
PUR black3m	M8-M03T/M12-F03T-3.0PUR/BK	M8-M04T/M12-F04T-3.0PUR/BK
PUR black5m	M8-M03T/M12-F03T-5.0PUR/BK	M8-M04T/M12-F04T-5.0PUR/BK
PUR black10m	M8-M03T/M12-F03T-10.0PUR/BK	M8-M04T/M12-F04T-10.0PUR/BK
Towchain black3m	M8-M03T/M12-F03T-3.0TL/BK	M8-M04T/M12-F04T-3.0TL/BK
Towchain black5m	M8-M03T/M12-F03T-5.0TL/BK	M8-M04T/M12-F04T-5.0TL/BK
Towchain black10m	M8-M03T/M12-F03T-10.0TL/BK	M8-M04T/M12-F04T-10.0TL/BK
Anti-Welding orange3m	M8-M03T/M12-F03T-3.0FH/OG	M8-M04T/M12-F04T-3.0FH/OG
Anti-Welding orange5m	M8-M03T/M12-F03T-5.0FH/OG	M8-M04T/M12-F04T-5.0FH/OG
Anti-Welding orange10m	M8-M03T/M12-F03T-10.0FH/OG	M8-M04T/M12-F04T-10.0FH/OG
Grey cable	GY	



Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm²	4*0.25mm²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



M8 Connector Harness



Double end pre cast wire harness

Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core
PVC	black3m	M8-M03T/M12-F03S-3.0PVC/BK	M8-M04T/M12-F04S-3.0PVC/BK
PVC	black5m	M8-M03T/M12-F03S-5.0PVC/BK	M8-M04T/M12-F04S-5.0PVC/BK
PVC	black10m	M8-M03T/M12-F03S-10.0PVC/BK	M8-M04T/M12-F04S-10.0PVC/BK
PUR	black3m	M8-M03T/M12-F03S-3.0PUR/BK	M8-M04T/M12-F04S-3.0PUR/BK
PUR	black5m	M8-M03T/M12-F03S-5.0PUR/BK	M8-M04T/M12-F04S-5.0PUR/BK
PUR	black10m	M8-M03T/M12-F03S-10.0PUR/BK	M8-M04T/M12-F04S-10.0PUR/BK
Towchain	black3m	M8-M03T/M12-F03S-3.0TL/BK	M8-M04T/M12-F04S-3.0TL/BK
Towchain	black5m	M8-M03T/M12-F03S-5.0TL/BK	M8-M04T/M12-F04S-5.0TL/BK
Towchain	black10m	M8-M03T/M12-F03S-10.0TL/BK	M8-M04T/M12-F04S-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/M12-F03S-3.0FH/OG	M8-M04T/M12-F04S-3.0FH/OG
Anti-Welding	orange5m	M8-M03T/M12-F03S-5.0FH/OG	M8-M04T/M12-F04S-5.0FH/OG
Anti-Welding	orange10m	M8-M03T/M12-F03S-10.0FH/OG	M8-M04T/M12-F04S-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core
PVC	black3m	M8-M03T/M12-F03T-LED-3.0PVC/BK	M8-M04T/M12-F04T-LED-3.0PVC/BK
PVC	black5m	M8-M03T/M12-F03T-LED-5.0PVC/BK	M8-M04T/M12-F04T-LED-5.0PVC/BK
PVC	black10m	M8-M03T/M12-F03T-LED-10.0PVC/BK	M8-M04T/M12-F04T-LED-10.0PVC/BK
PUR	black3m	M8-M03T/M12-F03T-LED-3.0PUR/BK	M8-M04T/M12-F04T-LED-3.0PUR/BK
PUR	black5m	M8-M03T/M12-F03T-LED-5.0PUR/BK	M8-M04T/M12-F04T-LED-5.0PUR/BK
PUR	black10m	M8-M03T/M12-F03T-LED-10.0PUR/BK	M8-M04T/M12-F04T-LED-10.0PUR/BK
Towchain	black3m	M8-M03T/M12-F03T-LED-3.0TL/BK	M8-M04T/M12-F04T-LED-3.0TL/BK
Towchain	black5m	M8-M03T/M12-F03T-LED-5.0TL/BK	M8-M04T/M12-F04T-LED-5.0TL/BK
Towchain	black10m	M8-M03T/M12-F03T-LED-10.0TL/BK	M8-M04T/M12-F04T-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/M12-F03T-LED-3.0FH/OG	M8-M04T/M12-F04T-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03T/M12-F03T-LED-5.0FH/OG	M8-M04T/M12-F04T-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03T/M12-F03T-LED-10.0FH/OG	M8-M04T/M12-F04T-LED-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM

M8 Connector Harness

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03T/M12-F03S-LED-3.0PVC/BK	M8-M04T/M12-F04S-LED-3.0PVC/BK
PVC	black5m	M8-M03T/M12-F03S-LED-5.0PVC/BK	M8-M04T/M12-F04S-LED-5.0PVC/BK
PVC	black10m	M8-M03T/M12-F03S-LED-10.0PVC/BK	M8-M04T/M12-F04S-LED-10.0PVC/BK
PUR	black3m	M8-M03T/M12-F03S-LED-3.0PUR/BK	M8-M04T/M12-F04S-LED-3.0PUR/BK
PUR	black5m	M8-M03T/M12-F03S-LED-5.0PUR/BK	M8-M04T/M12-F04S-LED-5.0PUR/BK
PUR	black10m	M8-M03T/M12-F03S-LED-10.0PUR/BK	M8-M04T/M12-F04S-LED-10.0PUR/BK
Towchain	black3m	M8-M03T/M12-F03S-LED-3.0TL/BK	M8-M04T/M12-F04S-LED-3.0TL/BK
Towchain	black5m	M8-M03T/M12-F03S-LED-5.0TL/BK	M8-M04T/M12-F04S-LED-5.0TL/BK
Towchain	black10m	M8-M03T/M12-F03S-LED-10.0TL/BK	M8-M04T/M12-F04S-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/M12-F03S-LED-3.0FH/OG	M8-M04T/M12-F04S-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03T/M12-F03S-LED-5.0FH/OG	M8-M04T/M12-F04S-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03T/M12-F03S-LED-10.0FH/OG	M8-M04T/M12-F04S-LED-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness

Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03S/M12-F03S-3.0PVC/BK	M8-M04S/M12-F04S-3.0PVC/BK
PVC	black5m	M8-M03S/M12-F03S-5.0PVC/BK	M8-M04S/M12-F04S-5.0PVC/BK
PVC	black10m	M8-M03S/M12-F03S-10.0PVC/BK	M8-M04S/M12-F04S-10.0PVC/BK
PUR	black3m	M8-M03S/M12-F03S-3.0PUR/BK	M8-M04S/M12-F04S-3.0PUR/BK
PUR	black5m	M8-M03S/M12-F03S-5.0PUR/BK	M8-M04S/M12-F04S-5.0PUR/BK
PUR	black10m	M8-M03S/M12-F03S-10.0PUR/BK	M8-M04S/M12-F04S-10.0PUR/BK
Towchain	black3m	M8-M03S/M12-F03S-3.0TL/BK	M8-M04S/M12-F04S-3.0TL/BK
Towchain	black5m	M8-M03S/M12-F03S-5.0TL/BK	M8-M04S/M12-F04S-5.0TL/BK
Towchain	black10m	M8-M03S/M12-F03S-10.0TL/BK	M8-M04S/M12-F04S-10.0TL/BK
Anti-Welding	orange3m	M8-M03S/M12-F03S-3.0FH/OG	M8-M04S/M12-F04S-3.0FH/OG
Anti-Welding	orange5m	M8-M03S/M12-F03S-5.0FH/OG	M8-M04S/M12-F04S-5.0FH/OG
Anti-Welding	orange10m	M8-M03S/M12-F03S-10.0FH/OG	M8-M04S/M12-F04S-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



M8 Connector Harness

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03S/M12-F03T-LED-3.0PVC/BK	M8-M04S/M12-F04T-LED-3.0PVC/BK
PVC	black5m	M8-M03S/M12-F03T-LED-5.0PVC/BK	M8-M04S/M12-F04T-LED-5.0PVC/BK
PVC	black10m	M8-M03S/M12-F03T-LED-10.0PVC/BK	M8-M04S/M12-F04T-LED-10.0PVC/BK
PUR	black3m	M8-M03S/M12-F03T-LED-3.0PUR/BK	M8-M04S/M12-F04T-LED-3.0PUR/BK
PUR	black5m	M8-M03S/M12-F03T-LED-5.0PUR/BK	M8-M04S/M12-F04T-LED-5.0PUR/BK
PUR	black10m	M8-M03S/M12-F03T-LED-10.0PUR/BK	M8-M04S/M12-F04T-LED-10.0PUR/BK
Towchain	black3m	M8-M03S/M12-F03T-LED-3.0TL/BK	M8-M04S/M12-F04T-LED-3.0TL/BK
Towchain	black5m	M8-M03S/M12-F03T-LED-5.0TL/BK	M8-M04S/M12-F04T-LED-5.0TL/BK
Towchain	black10m	M8-M03S/M12-F03T-LED-10.0TL/BK	M8-M04S/M12-F04T-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03S/M12-F03T-LED-3.0FH/OG	M8-M04S/M12-F04T-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03S/M12-F03T-LED-5.0FH/OG	M8-M04S/M12-F04T-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03S/M12-F03T-LED-10.0FH/OG	M8-M04S/M12-F04T-LED-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03S/M12-F03S-LED-3.0PVC/BK	M8-M04S/M12-F04S-LED-3.0PVC/BK
PVC	black5m	M8-M03S/M12-F03S-LED-5.0PVC/BK	M8-M04S/M12-F04S-LED-5.0PVC/BK
PVC	black10m	M8-M03S/M12-F03S-LED-10.0PVC/BK	M8-M04S/M12-F04S-LED-10.0PVC/BK
PUR	black3m	M8-M03S/M12-F03S-LED-3.0PUR/BK	M8-M04S/M12-F04S-LED-3.0PUR/BK
PUR	black5m	M8-M03S/M12-F03S-LED-5.0PUR/BK	M8-M04S/M12-F04S-LED-5.0PUR/BK
PUR	black10m	M8-M03S/M12-F03S-LED-10.0PUR/BK	M8-M04S/M12-F04S-LED-10.0PUR/BK
Towchain	black3m	M8-M03S/M12-F03S-LED-3.0TL/BK	M8-M04S/M12-F04S-LED-3.0TL/BK
Towchain	black5m	M8-M03S/M12-F03S-LED-5.0TL/BK	M8-M04S/M12-F04S-LED-5.0TL/BK
Towchain	black10m	M8-M03S/M12-F03S-LED-10.0TL/BK	M8-M04S/M12-F04S-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03S/M12-F03S-LED-3.0FH/OG	M8-M04S/M12-F04S-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03S/M12-F03S-LED-5.0FH/OG	M8-M04S/M12-F04S-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03S/M12-F03S-LED-10.0FH/OG	M8-M04S/M12-F04S-LED-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temprature and acid/alkali



Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM



M8 Connector Harness

Double end pre cast wire harness

Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core	Common spare parts
PVC	black3m	M8-M03T/M12-F03T-3.0PVC/BK	M8-M04T/M12-F04T-3.0PVC/BK	
PVC	black5m	M8-M03T/M12-F03T-5.0PVC/BK	M8-M04T/M12-F04T-5.0PVC/BK	
PVC	black10m	M8-M03T/M12-F03T-10.0PVC/BK	M8-M04T/M12-F04T-10.0PVC/BK	
PUR	black3m	M8-M03T/M12-F03T-3.0PUR/BK	M8-M04T/M12-F04T-3.0PUR/BK	
PUR	black5m	M8-M03T/M12-F03T-5.0PUR/BK	M8-M04T/M12-F04T-5.0PUR/BK	
PUR	black10m	M8-M03T/M12-F03T-10.0PUR/BK	M8-M04T/M12-F04T-10.0PUR/BK	
Towchain	black3m	M8-M03T/M12-F03T-3.0TL/BK	M8-M04T/M12-F04T-3.0TL/BK	
Towchain	black5m	M8-M03T/M12-F03T-5.0TL/BK	M8-M04T/M12-F04T-5.0TL/BK	
Towchain	black10m	M8-M03T/M12-F03T-10.0TL/BK	M8-M04T/M12-F04T-10.0TL/BK	
Anti-Welding	orange3m	M8-M03T/M12-F03T-3.0FH/OG	M8-M04T/M12-F04T-3.0FH/OG	
Anti-Welding	orange5m	M8-M03T/M12-F03T-5.0FH/OG	M8-M04T/M12-F04T-5.0FH/OG	
Anti-Welding	orange10m	M8-M03T/M12-F03T-10.0FH/OG	M8-M04T/M12-F04T-10.0FH/OG	
Grey cable	GY			

Double end pre cast wire harness

Product drawing	Product size	Pins Assignment
		

Material and Length		3core	4core	Common spare parts
PVC	black3m	M12-M03T/M8-F03S-3.0PVC/BK	M12-M04T/M8-F04S-3.0PVC/BK	
PVC	black5m	M12-M03T/M8-F03S-5.0PVC/BK	M12-M04T/M8-F04S-5.0PVC/BK	
PVC	black10m	M12-M03T/M8-F03S-10.0PVC/BK	M12-M04T/M8-F04S-10.0PVC/BK	
PUR	black3m	M12-M03T/M8-F03S-3.0PUR/BK	M12-M04T/M8-F04S-3.0PUR/BK	
PUR	black5m	M12-M03T/M8-F03S-5.0PUR/BK	M12-M04T/M8-F04S-5.0PUR/BK	
PUR	black10m	M12-M03T/M8-F03S-10.0PUR/BK	M12-M04T/M8-F04S-10.0PUR/BK	
Towchain	black3m	M12-M03T/M8-F03S-3.0TL/BK	M12-M04T/M8-F04S-3.0TL/BK	
Towchain	black5m	M12-M03T/M8-F03S-5.0TL/BK	M12-M04T/M8-F04S-5.0TL/BK	
Towchain	black10m	M12-M03T/M8-F03S-10.0TL/BK	M12-M04T/M8-F04S-10.0TL/BK	
Anti-Welding	orange3m	M12-M03T/M8-F03S-3.0FH/OG	M12-M04T/M8-F04S-3.0FH/OG	
Anti-Welding	orange5m	M12-M03T/M8-F03S-5.0FH/OG	M12-M04T/M8-F04S-5.0FH/OG	
Anti-Welding	orange10m	M12-M03T/M8-F03S-10.0FH/OG	M12-M04T/M8-F04S-10.0FH/OG	
Grey cable	GY			

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85℃	



M8 Connector Harness

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M8-M03T/M12-F03T-LED-3.0PVC/BK	M8-M04T/M12-F04T-LED-3.0PVC/BK
PVC	black5m	M8-M03T/M12-F03T-LED-5.0PVC/BK	M8-M04T/M12-F04T-LED-5.0PVC/BK
PVC	black10m	M8-M03T/M12-F03T-LED-10.0PVC/BK	M8-M04T/M12-F04T-LED-10.0PVC/BK
PUR	black3m	M8-M03T/M12-F03T-LED-3.0PUR/BK	M8-M04T/M12-F04T-LED-3.0PUR/BK
PUR	black5m	M8-M03T/M12-F03T-LED-5.0PUR/BK	M8-M04T/M12-F04T-LED-5.0PUR/BK
PUR	black10m	M8-M03T/M12-F03T-LED-10.0PUR/BK	M8-M04T/M12-F04T-LED-10.0PUR/BK
Towchain	black3m	M8-M03T/M12-F03T-LED-3.0TL/BK	M8-M04T/M12-F04T-LED-3.0TL/BK
Towchain	black5m	M8-M03T/M12-F03T-LED-5.0TL/BK	M8-M04T/M12-F04T-LED-5.0TL/BK
Towchain	black10m	M8-M03T/M12-F03T-LED-10.0TL/BK	M8-M04T/M12-F04T-LED-10.0TL/BK
Anti-Welding	orange3m	M8-M03T/M12-F03T-LED-3.0FH/OG	M8-M04T/M12-F04T-LED-3.0FH/OG
Anti-Welding	orange5m	M8-M03T/M12-F03T-LED-5.0FH/OG	M8-M04T/M12-F04T-LED-5.0FH/OG
Anti-Welding	orange10m	M8-M03T/M12-F03T-LED-10.0FH/OG	M8-M04T/M12-F04T-LED-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3core	4core
PVC	black3m	M12-M03T/M8-F03S-LED-3.0PVC/BK	M12-M04T/M8-F04S-LED-3.0PVC/BK
PVC	black5m	M12-M03T/M8-F03S-LED-5.0PVC/BK	M12-M04T/M8-F04S-LED-5.0PVC/BK
PVC	black10m	M12-M03T/M8-F03S-LED-10.0PVC/BK	M12-M04T/M8-F04S-LED-10.0PVC/BK
PUR	black3m	M12-M03T/M8-F03S-LED-3.0PUR/BK	M12-M04T/M8-F04S-LED-3.0PUR/BK
PUR	black5m	M12-M03T/M8-F03S-LED-5.0PUR/BK	M12-M04T/M8-F04S-LED-5.0PUR/BK
PUR	black10m	M12-M03T/M8-F03S-LED-10.0PUR/BK	M12-M04T/M8-F04S-LED-10.0PUR/BK
Towchain	black3m	M12-M03T/M8-F03S-LED-3.0TL/BK	M12-M04T/M8-F04S-LED-3.0TL/BK
Towchain	black5m	M12-M03T/M8-F03S-LED-5.0TL/BK	M12-M04T/M8-F04S-LED-5.0TL/BK
Towchain	black10m	M12-M03T/M8-F03S-LED-10.0TL/BK	M12-M04T/M8-F04S-LED-10.0TL/BK
Anti-Welding	orange3m	M12-M03T/M8-F03S-LED-3.0FH/OG	M12-M04T/M8-F04S-LED-3.0FH/OG
Anti-Welding	orange5m	M12-M03T/M8-F03S-LED-5.0FH/OG	M12-M04T/M8-F04S-LED-5.0FH/OG
Anti-Welding	orange10m	M12-M03T/M8-F03S-LED-10.0FH/OG	M12-M04T/M8-F04S-LED-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm ²	4*0.25mm ²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM

M8 Connector Harness

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3 core	4 core
PVC	black3m	M8P-M03T/M12P-F03T-3.0PVC/BK	M8P-M04T/M12P-F04T-3.0PVC/BK
PVC	black5m	M8P-M03T/M12P-F03T-5.0PVC/BK	M8P-M04T/M12P-F04T-5.0PVC/BK
PVC	black10m	M8P-M03T/M12P-F03T-10.0PVC/BK	M8P-M04T/M12P-F04T-10.0PVC/BK
PUR	black3m	M8P-M03T/M12P-F03T-3.0PUR/BK	M8P-M04T/M12P-F04T-3.0PUR/BK
PUR	black5m	M8P-M03T/M12P-F03T-5.0PUR/BK	M8P-M04T/M12P-F04T-5.0PUR/BK
PUR	black10m	M8P-M03T/M12P-F03T-10.0PUR/BK	M8P-M04T/M12P-F04T-10.0PUR/BK
Towchain	black3m	M8P-M03T/M12P-F03T-3.0TL/BK	M8P-M04T/M12P-F04T-3.0TL/BK
Towchain	black5m	M8P-M03T/M12P-F03T-5.0TL/BK	M8P-M04T/M12P-F04T-5.0TL/BK
Towchain	black10m	M8P-M03T/M12P-F03T-10.0TL/BK	M8P-M04T/M12P-F04T-10.0TL/BK
Anti-Welding	orange3m	M8P-M03T/M12P-F03T-3.0FH/OG	M8P-M04T/M12P-F04T-3.0FH/OG
Anti-Welding	orange5m	M8P-M03T/M12P-F03T-5.0FH/OG	M8P-M04T/M12P-F04T-5.0FH/OG
Anti-Welding	orange10m	M8P-M03T/M12P-F03T-10.0FH/OG	M8P-M04T/M12P-F04T-10.0FH/OG
Grey cable	GY		

Double end pre cast wire harness



Product drawing	Product size	Pins Assignment

Material and Length		3 core	4 core
PVC	black3m	M8P-M03S/M12P-F03S-3.0PVC/BK	M8P-M04S/M12P-F04S-3.0PVC/BK
PVC	black5m	M8P-M03S/M12P-F03S-5.0PVC/BK	M8P-M04S/M12P-F04S-5.0PVC/BK
PVC	black10m	M8P-M03S/M12P-F03S-10.0PVC/BK	M8P-M04S/M12P-F04S-10.0PVC/BK
PUR	black3m	M8P-M03S/M12P-F03S-3.0PUR/BK	M8P-M04S/M12P-F04S-3.0PUR/BK
PUR	black5m	M8P-M03S/M12P-F03S-5.0PUR/BK	M8P-M04S/M12P-F04S-5.0PUR/BK
PUR	black10m	M8P-M03S/M12P-F03S-10.0PUR/BK	M8P-M04S/M12P-F04S-10.0PUR/BK
Towchain	black3m	M8P-M03S/M12P-F03S-3.0TL/BK	M8P-M04S/M12P-F04S-3.0TL/BK
Towchain	black5m	M8P-M03S/M12P-F03S-5.0TL/BK	M8P-M04S/M12P-F04S-5.0TL/BK
Towchain	black10m	M8P-M03S/M12P-F03S-10.0TL/BK	M8P-M04S/M12P-F04S-10.0TL/BK
Anti-Welding	orange3m	M8P-M03S/M12P-F03S-3.0FH/OG	M8P-M04S/M12P-F04S-3.0FH/OG
Anti-Welding	orange5m	M8P-M03S/M12P-F03S-5.0FH/OG	M8P-M04S/M12P-F04S-5.0FH/OG
Anti-Welding	orange10m	M8P-M03S/M12P-F03S-10.0FH/OG	M8P-M04S/M12P-F04S-10.0FH/OG
Grey cable	GY		

Length/Material Could be customized according to different enviroment ,like extrame temperture and acid/alkali

Rated voltage	60 V DC±25%	
Cable specification	3*0.25mm²	4*0.25mm²
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	

