















7/8 Connector Harness

With open ended wires

Product drawing		Product size		Pins Assignment		
						
Material and Length		4core	4core	5core	5core	
PVC	grey3m	7/8-M04T-3.0PVC/GY	7/8-F04T-3.0PVC/GY	7/8-M05T-3.0PVC/GY	7/8-F05T-3.0PVC/GY	Common spare parts
PVC	grey5m	7/8-M04T-5.0PVC/GY	7/8-F04T-5.0PVC/GY	7/8-M05T-5.0PVC/GY	7/8-F05T-5.0PVC/GY	
PVC	grey10m	7/8-M04T-10.0PVC/GY	7/8-F04T-10.0PVC/GY	7/8-M05T-10.0PVC/G	7/8-F05T-10.0PVC/GY	
PUR	grey3m	7/8-M04T-3.0PUR/GY	7/8-F04T-3.0PUR/GY	7/8-M05T-3.0PUR/GY	7/8-F05T-3.0PUR/GY	
PUR	grey5m	7/8-M04T-5.0PUR/GY	7/8-F04T-5.0PUR/GY	7/8-M05T-5.0PUR/GY	7/8-F05T-5.0PUR/GY	
PUR	grey10m	7/8-M04T-10.0PUR/GY	7/8-F04T-10.0PUR/GY	7/8-M05T-10.0PUR/GY	7/8-F05T-10.0PUR/GY	
DragChain	grey3m	7/8-M04T-3.0TL/GY	7/8-F04T-3.0TL/GY	7/8-M05T-3.0TL/GY	7/8-F05T-3.0TL/GY	
DragChain	grey5m	7/8-M04T-5.0TL/GY	7/8-F04T-5.0TL/GY	7/8-M05T-5.0TL/GY	7/8-F05T-5.0TL/GY	
DragChain	grey10m	7/8-M04T-10.0TL/GY	7/8-F04T-10.0TL/GY	7/8-M05T-10.0TL/GY	7/8-F05T-10.0TL/GY	
Yellow cable	YE					
Circuit						

With open ended wires

Product drawing			Product size			Pins Assignment		
								
Material and Length			4core	4core	5core	5core	Common spare parts	
PVC	grey3m	7/8-M04S-3.0PVC/GY	7/8-F04S-3.0PVC/GY	7/8-M05S-3.0PVC/GY	7/8-F05S-3.0PVC/GY			
PVC	grey5m	7/8-M04S-5.0PVC/GY	7/8-F04S-5.0PVC/GY	7/8-M05S-5.0PVC/GY	7/8-F05S-5.0PVC/GY			
PVC	grey10m	7/8-M04S-10.0PVC/GY	7/8-F04S-10.0PVC/GY	7/8-M05S-10.0PVC/GY	7/8-F05S-10.0PVC/GY			
PUR	grey3m	7/8-M04S-3.0PUR/GY	7/8-F04S-3.0PUR/GY	7/8-M05S-3.0PUR/GY	7/8-F05S-3.0PUR/GY			
PUR	grey5m	7/8-M04S-5.0PUR/GY	7/8-F04S-5.0PUR/GY	7/8-M05S-5.0PUR/GY	7/8-F05S-5.0PUR/GY			
PUR	grey10m	7/8-M04S-10.0PUR/GY	7/8-F04S-10.0PUR/GY	7/8-M05S-10.0PUR/GY	7/8-F05S-10.0PUR/GY			
DragChain	grey3m	7/8-M04S-3.0TL/GY	7/8-F04S-3.0TL/GY	7/8-M05S-3.0TL/GY	7/8-F05S-3.0TL/GY			
DragChain	grey5m	7/8-M04S-5.0TL/GY	7/8-F04S-5.0TL/GY	7/8-M05S-5.0TL/GY	7/8-F05S-5.0TL/GY			
DragChain	grey10m	7/8-M04S-10.0TL/GY	7/8-F04S-10.0TL/GY	7/8-M05S-10.0TL/GY	7/8-F05S-10.0TL/GY			
Yellow cable YE								
Circuit								

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	230/400 V AC/DC		
Rated current	MAX.10A		
ProtectionClass(IEC 60529)	IP67		
Ambient temperature	-25~+85°C		
Cable specification	4G1.5mm ²	4G1.5mm ²	5G1.5mm ²








Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM








ISO 9001 (2015) quality management system

7/8 Connector Harness

Double end pre cast wire harness

Product drawing	Product size		Pins Assignment
			
Material and Length		4core	5score
PVC	grey3m	7/8-M04T/M04T-3.0PVC/GY	7/8-M05T/M05T-3.0PVC/GY
PVC	grey5m	7/8-M04T/M04T-5.0PVC/GY	7/8-M05T/M05T-5.0PVC/GY
PVC	grey10m	7/8-M04T/M04T-10.0PVC/GY	7/8-M05T/M05T-10.0PVC/GY
PUR	grey3m	7/8-M04T/M04T-3.0PUR/GY	7/8-M05T/M05T-3.0PUR/GY
PUR	grey5m	7/8-M04T/M04T-5.0PUR/GY	7/8-M05T/M05T-5.0PUR/GY
PUR	grey10m	7/8-M04T/M04T-10.0PUR/GY	7/8-M05T/M05T-10.0PUR/GY
DragChain	grey3m	7/8-M04T/M04T-3.0TL/GY	7/8-M05T/M05T-3.0TL/GY
DragChain	grey5m	7/8-M04T/M04T-5.0TL/GY	7/8-M05T/M05T-5.0TL/GY
DragChain	grey10m	7/8-M04T/M04T-10.0TL/GY	7/8-M05T/M05T-10.0TL/GY
Yellow cable	YE		
Circuit			

Double end pre cast wire harness

Product drawing	Product size		Pins Assignment
			
Material and Length		4core	5score
PVC	grey3m	7/8-M04T/F04T-3.0PVC/GY	7/8-M05T/F05T-3.0PVC/GY
PVC	grey5m	7/8-M04T/F04T-5.0PVC/GY	7/8-M05T/F05T-5.0PVC/GY
PVC	grey10m	7/8-M04T/F04T-10.0PVC/GY	7/8-M05T/F05T-10.0PVC/GY
PUR	grey3m	7/8-M04T/F04T-3.0PUR/GY	7/8-M05T/F05T-3.0PUR/GY
PUR	grey5m	7/8-M04T/F04T-5.0PUR/GY	7/8-M05T/F05T-5.0PUR/GY
PUR	grey10m	7/8-M04T/F04T-10.0PUR/GY	7/8-M05T/F05T-10.0PUR/GY
DragChain	grey3m	7/8-M04T/F04T-3.0TL/GY	7/8-M05T/F05T-3.0TL/GY
DragChain	grey5m	7/8-M04T/F04T-5.0TL/GY	7/8-M05T/F05T-5.0TL/GY
DragChain	grey10m	7/8-M04T/F04T-10.0TL/GY	7/8-M05T/F05T-10.0TL/GY
Yellow cable	YE		
			

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali






Rated voltage	230/400 V AC/DC	
Rated current	MAX.10A	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	
Cable specification	4G1.5mm²	5G1.5mm²








Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM

7/8 Connector Harness

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment
				
Material and Length		4core	5core	
PVC	grey3m	7/8-M04T/M04S-3.0PVC/GY	7/8-M05T/M05S-3.0PVC/GY	
PVC	grey5m	7/8-M04T/M04S-5.0PVC/GY	7/8-M05T/M05S-5.0PVC/GY	
PVC	grey10m	7/8-M04T/M04S-10.0PVC/GY	7/8-M05T/M05S-10.0PVC/GY	
PUR	grey3m	7/8-M04T/M04S-3.0PUR/GY	7/8-M05T/M05S-3.0PUR/GY	
PUR	grey5m	7/8-M04T/M04S-5.0PUR/GY	7/8-M05T/M05S-5.0PUR/GY	
PUR	grey10m	7/8-M04T/M04S-10.0PUR/GY	7/8-M05T/M05S-10.0PUR/GY	
DragChain	grey3m	7/8-M04T/M04S-3.0TL/GY	7/8-M05T/M05S-3.0TL/GY	
DragChain	grey5m	7/8-M04T/M04S-5.0TL/GY	7/8-M05T/M05S-5.0TL/GY	
DragChain	grey10m	7/8-M04T/M04S-10.0TL/GY	7/8-M05T/M05S-10.0TL/GY	
Yellow cable	YE			
Circuit				

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment
				
Material and Length		4core	5core	
PVC	grey3m	7/8-M04T/F04S-3.0PVC/GY	7/8-M05T/F05S-3.0PVC/GY	
PVC	grey5m	7/8-M04T/F04S-5.0PVC/GY	7/8-M05T/F05S-5.0PVC/GY	
PVC	grey10m	7/8-M04T/F04S-10.0PVC/GY	7/8-M05T/F05S-10.0PVC/GY	
PUR	grey3m	7/8-M04T/F04S-3.0PUR/GY	7/8-M05T/F05S-3.0PUR/GY	
PUR	grey5m	7/8-M04T/F04S-5.0PUR/GY	7/8-M05T/F05S-5.0PUR/GY	
PUR	grey10m	7/8-M04T/F04S-10.0PUR/GY	7/8-M05T/F05S-10.0PUR/GY	
DragChain	grey3m	7/8-M04T/F04S-3.0TL/GY	7/8-M05T/F05S-3.0TL/GY	
DragChain	grey5m	7/8-M04T/F04S-5.0TL/GY	7/8-M05T/F05S-5.0TL/GY	
DragChain	grey10m	7/8-M04T/F04S-10.0TL/GY	7/8-M05T/F05S-10.0TL/GY	
Yellow cable	YE			
Circuit				

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali




Rated voltage	230/400 V AC/DC	
Rated current	MAX.10A	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	
Cable specification	4G1.5mm ²	5G1.5mm ²



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM




7/8 Connector Harness

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment	
					
Material and Length		Circuit		Circuit	
PVC	black3m	7/8-M04T/M12-F04T-3.0PVC/BK		7/8-M05T/M12-F05T-3.0PVC/BK	
PVC	black5m	7/8-M04T/M12-F04T-5.0PVC/BK		7/8-M05T/M12-F05T-5.0PVC/BK	
PVC	black10m	7/8-M04T/M12-F04T-10.0PVC/BK		7/8-M05T/M12-F05T-10.0PVC/BK	
PUR	black3m	7/8-M04T/M12-F04T-3.0PUR/BK		7/8-M05T/M12-F05T-3.0PUR/BK	
PUR	black5m	7/8-M04T/M12-F04T-5.0PUR/BK		7/8-M05T/M12-F05T-5.0PUR/BK	
PUR	black10m	7/8-M04T/M12-F04T-10.0PUR/BK		7/8-M05T/M12-F05T-10.0PUR/BK	
DragChain	black3m	7/8-M04T/M12-F04T-3.0TL/BK		7/8-M05T/M12-F05T-3.0TL/BK	
DragChain	black5m	7/8-M04T/M12-F04T-5.0TL/BK		7/8-M05T/M12-F05T-5.0TL/BK	
DragChain	black10m	7/8-M04T/M12-F04T-10.0TL/BK		7/8-M05T/M12-F05T-10.0TL/BK	
Yellow cable YE					

Length/Material Could be customized according to different enviroment ,like extrame temperture and acid/alkali

Rated voltage	250V	
Rated current	4 A	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-0~+60°C(move) -5~+60°C(regular)	
Cable specification	4*0.34mm²	

Product drawing		Product size		Pins Assignment	
					
Material and Length		Circuit		Circuit	
PVC	grey3m	7/8-2F04T-3.0PVC/GY		7/8-2F05T-3.0PVC/GY	
PVC	grey5m	7/8-2F04T-5.0PVC/GY		7/8-2F05T-5.0PVC/GY	
PVC	grey10m	7/8-2F04T-10.0PVC/GY		7/8-2F05T-10.0PVC/GY	
PUR	grey3m	7/8-2F04T-3.0PUR/GY		7/8-2F05T-3.0PUR/GY	
PUR	grey5m	7/8-2F04T-5.0PUR/GY		7/8-2F05T-5.0PUR/GY	
PUR	grey10m	7/8-2F04T-10.0PUR/GY		7/8-2F05T-10.0PUR/GY	
DragChain	grey3m	7/8-2F04T-3.0TL/GY		7/8-2F05T-3.0TL/GY	
DragChain	grey5m	7/8-2F04T-5.0TL/GY		7/8-2F05T-5.0TL/GY	
DragChain	grey10m	7/8-2 F04T-10.0TL/GY		7/8-2F05T-10.0TL/GY	
Yellow cable YE					
Circuit					

Length/Material Could be customized according to different enviroment ,like extrame temperture and acid/alkali

Rated voltage	230/400 V AC/DC	
Rated current	MAX.10A	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	
Cable specification	4G1.5mm²	5G1.5mm²








Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM








ISO 9001 (2015) quality management system

7/8 Connector Harness

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment
				
Material and Length		4core	5core	
PVC	grey3m	7/8-F04T/M04S-3.0PVC/GY	7/8-F05T/M05S-3.0PVC/GY	
PVC	grey5m	7/8-F04T/M04S-5.0PVC/GY	7/8-F05T/M05S-5.0PVC/GY	
PVC	grey10m	7/8-F04T/M04S-10.0PVC/GY	7/8-F05T/M05S-10.0PVC/GY	
PUR	grey3m	7/8-F04T/M04S-3.0PUR/GY	7/8-F05T/M05S-3.0PUR/GY	
PUR	grey5m	7/8-F04T/M04S-5.0PUR/GY	7/8-F05T/M05S-5.0PUR/GY	
PUR	grey10m	7/8-F04T/M04S-10.0PUR/GY	7/8-F05T/M05S-10.0PUR/GY	
DragChain	grey3m	7/8-F04T/M04S-3.0TL/GY	7/8-F05T/M05S-3.0TL/GY	
DragChain	grey5m	7/8-F04T/M04S-5.0TL/GY	7/8-F05T/M05S-5.0TL/GY	
DragChain	grey10m	7/8-F04T/M04S-10.0TL/GY	7/8-F05T/M05S-10.0TL/GY	
Yellow cable	YE			
Circuit				

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment
				
Material and Length		4core	5core	
PVC	grey3m	7/8-F04T/F04S-3.0PVC/GY	7/8-F05T/F05S-3.0PVC/GY	
PVC	grey5m	7/8-F04T/F04S-5.0PVC/GY	7/8-F05T/F05S-5.0PVC/GY	
PVC	grey10m	7/8-F04T/F04S-10.0PVC/GY	7/8-F05T/F05S-10.0PVC/GY	
PUR	grey3m	7/8-F04T/F04S-3.0PUR/GY	7/8-F05T/F05S-3.0PUR/GY	
PUR	grey5m	7/8-F04T/F04S-5.0PUR/GY	7/8-F05T/F05S-5.0PUR/GY	
PUR	grey10m	7/8-F04T/F04S-10.0PUR/GY	7/8-F05T/F05S-10.0PUR/GY	
DragChain	grey3m	7/8-F04T/F04S-3.0TL/GY	7/8-F05T/F05S-3.0TL/GY	
DragChain	grey5m	7/8-F04T/F04S-5.0TL/GY	7/8-F05T/F05S-5.0TL/GY	
DragChain	grey10m	7/8-F04T/F04S-10.0TL/GY	7/8-F05T/F05S-10.0TL/GY	
Yellow cable	YE			
Circuit				

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali


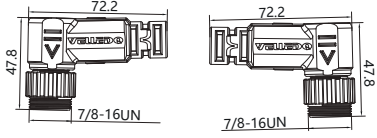



Rated voltage	230/400 V AC/DC	
Rated current	MAX.10A	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	
Cable specification	4G1.5mm ²	5G1.5mm ²




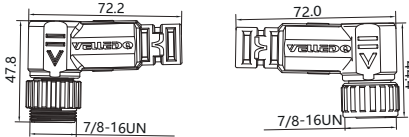



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM

7/8 Connector Harness

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment
				
Material and Length		4core	5core	
PVC	grey3m	7/8-2M04S-3.0PVC/GY	7/8-2M05S-3.0PVC/GY	
PVC	grey5m	7/8-2M04S-5.0PVC/GY	7/8-2M05S-5.0PVC/GY	
PVC	grey10m	7/8-2M04S-10.0PVC/GY	7/8-2M05S-10.0PVC/GY	
PUR	grey3m	7/8-2M04S-3.0PUR/GY	7/8-2M05S-3.0PUR/GY	
PUR	grey5m	7/8-2M04S-5.0PUR/GY	7/8-2M05S-5.0PUR/GY	
PUR	grey10m	7/8-2M04S-10.0PUR/GY	7/8-2M05S-10.0PUR/GY	
DragChain	grey3m	7/8-2M04S-3.0TL/GY	7/8-2M05S-3.0TL/GY	
DragChain	grey5m	7/8-2M04S-5.0TL/GY	7/8-2M05S-5.0TL/GY	
DragChain	grey10m	7/8-2M04S-10.0TL/GY	7/8-2M05S-10.0TL/GY	
Yellow cable	YE			
Circuit				

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment
				
Material and Length		4core	5core	
PVC	grey3m	7/8-M04S/F04S-3.0PVC/GY	7/8-M05S/F05S-3.0PVC/GY	
PVC	grey5m	7/8-M04S/F04S-5.0PVC/GY	7/8-M05S/F05S-5.0PVC/GY	
PVC	grey10m	7/8-M04S/F04S-10.0PVC/GY	7/8-M05S/F05S-10.0PVC/GY	
PUR	grey3m	7/8-M04S/F04S-3.0PUR/GY	7/8-M05S/F05S-3.0PUR/GY	
PUR	grey5m	7/8-M04S/F04S-5.0PUR/GY	7/8-M05S/F05S-5.0PUR/GY	
PUR	grey10m	7/8-M04S/F04S-10.0PUR/GY	7/8-M05S/F05S-10.0PUR/GY	
DragChain	grey3m	7/8-M04S/F04S-3.0TL/GY	7/8-M05S/F05S-3.0TL/GY	
DragChain	grey5m	7/8-M04S/F04S-5.0TL/GY	7/8-M05S/F05S-5.0TL/GY	
DragChain	grey10m	7/8-M04S/F04S-10.0TL/GY	7/8-M05S/F05S-10.0TL/GY	
Yellow cable	YE			
Circuit				

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	230/400 V AC/DC
Rated current	MAX.10A
ProtectionClass(IEC 60529)	IP67
Ambient temperature	-25~+85°C
Cable specification	4G1.5mm ² 5G1.5mm ²




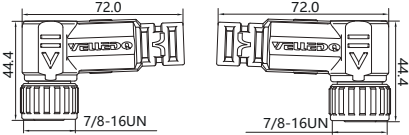



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM









ISO 9001 (2015) quality management system

7/8 Connector Harness

Double end pre cast wire harness

Product drawing		Product size		Pins Assignment
				
Material and Length		4core	5core	
PVC	grey3m	7/8-2F04S-3.0PVC/GY	7/8-2F05S-3.0PVC/GY	
PVC	grey5m	7/8-2F04S-5.0PVC/GY	7/8-2F05S-5.0PVC/GY	
PVC	grey10m	7/8-2F04S-10.0PVC/GY	7/8-2F05S-10.0PVC/GY	
PUR	grey3m	7/8-2F04S-3.0PUR/GY	7/8-2F05S-3.0PUR/GY	
PUR	grey5m	7/8-2F04S-5.0PUR/GY	7/8-2F05S-5.0PUR/GY	
PUR	grey10m	7/8-2F04S-10.0PUR/GY	7/8-2F05S-10.0PUR/GY	
DragChain	grey3m	7/8-2F04S-3.0TL/GY	7/8-2F05S-3.0TL/GY	
DragChain	grey5m	7/8-2F04S-5.0TL/GY	7/8-2F05S-5.0TL/GY	
DragChain	grey10m	7/8-2F04S-10.0TL/GY	7/8-2F05S-10.0TL/GY	
Yellow cable	YE			
Circuit				

With open ended wires Flange mounting

Product drawing	Hole drawing	Product size	Pins Assignment	
				
Material and Length		4core	5core	
PVC	grey3m	FLQ-7/8-M04T(M25)-3.0PVC/GY	FLQ-7/8-M05T(M25)-3.0PVC/GY	Common spare parts
PVC	grey5m	FLQ-7/8-M04T(M25)-5.0PVC/GY	FLQ-7/8-M05T(M25)-5.0PVC/GY	
PVC	grey10m	FLQ-7/8-M04T(M25)-10.0PVC/GY	FLQ-7/8-M05T(M25)-10.0PVC/GY	
PUR	grey3m	FLQ-7/8-M04T(M25)-3.0PUR/GY	FLQ-7/8-M05T(M25)-3.0PUR/GY	
PUR	grey5m	FLQ-7/8-M04T(M25)-5.0PUR/GY	FLQ-7/8-M05T(M25)-5.0PUR/GY	
PUR	grey10m	FLQ-7/8-M04T(M25)-10.0PUR/GY	FLQ-7/8-M05T(M25)-10.0PUR/GY	
DragChain	grey3m	FLQ-7/8-M04T(M25)-3.0TL/GY	FLQ-7/8-M05T(M25)-3.0TL/GY	
DragChain	grey5m	FLQ-7/8-M04T(M25)-5.0TL/GY	FLQ-7/8-M05T(M25)-5.0TL/GY	
DragChain	grey10m	FLQ-7/8-M04T(M25)-10.0TL/GY	FLQ-7/8-M05T(M25)-10.0TL/GY	
Yellow cable	YE			
Circuit				

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali







Rated voltage	230/400 V AC/DC
Rated current	MAX.10A
ProtectionClass(IEC 60529)	IP67
Ambient temperature	-25~+85°C
Cable specification	4G1.5mm ² 5G1.5mm ²









Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM

7/8 Connector Harness

With open ended wires Flange mounting

Product drawing	Hole drawing	Product size	Pins Assignment	
				
Material and Length				
		4core	5core	Common spare parts
PVC	grey3m	FLQ-7/8-F04T(M25)-3.0PVC/GY	FLQ-7/8-F05T(M25)-3.0PVC/GY	
PVC	grey5m	FLQ-7/8-F04T(M25)-5.0PVC/GY	FLQ-7/8-F05T(M25)-5.0PVC/GY	
PVC	grey10m	FLQ-7/8-F04T(M25)-10.0PVC/GY	FLQ-7/8-F05T(M25)-10.0PVC/GY	
PUR	grey3m	FLQ-7/8-F04T(M25)-3.0PUR/GY	FLQ-7/8-F05T(M25)-3.0PUR/GY	
PUR	grey5m	FLQ-7/8-F04T(M25)-5.0PUR/GY	FLQ-7/8-F05T(M25)-5.0PUR/GY	
PUR	grey10m	FLQ-7/8-F04T(M25)-10.0PUR/GY	FLQ-7/8-F05T(M25)-10.0PUR/GY	
DragChain	grey3m	FLQ-7/8-F04T(M25)-3.0TL/GY	FLQ-7/8-F05T(M25)-3.0TL/GY	
DragChain	grey5m	FLQ-7/8-F04T(M25)-5.0TL/GY	FLQ-7/8-F05T(M25)-5.0TL/GY	
DragChain	grey10m	FLQ-7/8-F04T(M25)-10.0TL/GY	FLQ-7/8-F05T(M25)-10.0TL/GY	
Yellow cable	YE			
Circuit				

With open ended wires Flange mounting

Product drawing		Hole drawing	Product size		Pins Assignment	
						
Material and Length		4core		5core		
PVC	grey3m	FLH-7/8-M04T(M25)-3.0PVC/GY		FLH-7/8-M05T(M25)-3.0PVC/GY		
PVC	grey5m	FLH-7/8-M04T(M25)-5.0PVC/GY		FLH-7/8-M05T(M25)-5.0PVC/GY		
PVC	grey10m	FLH-7/8-M04T(M25)-10.0PVC/GY		FLH-7/8-M05T(M25)-10.0PVC/GY		
PUR	grey3m	FLH-7/8-M04T(M25)-3.0PUR/GY		FLH-7/8-M05T(M25)-3.0PUR/GY		
PUR	grey5m	FLH-7/8-M04T(M25)-5.0PUR/GY		FLH-7/8-M05T(M25)-5.0PUR/GY		
PUR	grey10m	FLH-7/8-M04T(M25)-10.0PUR/GY		FLH-7/8-M05T(M25)-10.0PUR/GY		
DragChain	grey3m	FLH-7/8-M04T(M25)-3.0TL/GY		FLH-7/8-M05T(M25)-3.0TL/GY		
DragChain	grey5m	FLH-7/8-M04T(M25)-5.0TL/GY		FLH-7/8-M05T(M25)-5.0TL/GY		
DragChain	grey10m	FLH-7/8-M04T(M25)-10.0TL/GY		FLH-7/8-M05T(M25)-10.0TL/GY		
Yellow cable	YE					
Circuit						

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali





Rated voltage	230/400 V AC/DC
Rated current	MAX.10A
ProtectionClass(IEC 60529)	IP67
Ambient temperature	-25~+85°C
Cable specification	4G1.5mm ² 5G1.5mm ²



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM

7/8 Connector Harness

With open ended wires Flange mounting

Product drawing	Hole drawing	Product size	Pins Assignment
			

Material and Length		4core	5core	Common spare parts
PVC	grey3m	FLH-7/8-F04T(M25)-3.0PVC/GY	FLH-7/8-F05T(M25)-3.0PVC/GY	
PVC	grey5m	FLH-7/8-F04T(M25)-5.0PVC/GY	FLH-7/8-F05T(M25)-5.0PVC/GY	
PVC	grey10m	FLH-7/8-F04T(M25)-10.0PVC/GY	FLH-7/8-F05T(M25)-10.0PVC/GY	
PUR	grey3m	FLH-7/8-F04T(M25)-3.0PUR/GY	FLH-7/8-F05T(M25)-3.0PUR/GY	
PUR	grey5m	FLH-7/8-F04T(M25)-5.0PUR/GY	FLH-7/8-F05T(M25)-5.0PUR/GY	
PUR	grey10m	FLH-7/8-F04T(M25)-10.0PUR/GY	FLH-7/8-F05T(M25)-10.0PUR/GY	
DragChain	grey3m	FLH-7/8-F04T(M25)-3.0TL/GY	FLH-7/8-F05T(M25)-3.0TL/GY	
DragChain	grey5m	FLH-7/8-F04T(M25)-5.0TL/GY	FLH-7/8-F05T(M25)-5.0TL/GY	
DragChain	grey10m	FLH-7/8-F04T(M25)-10.0TL/GY	FLH-7/8-F05T(M25)-10.0TL/GY	







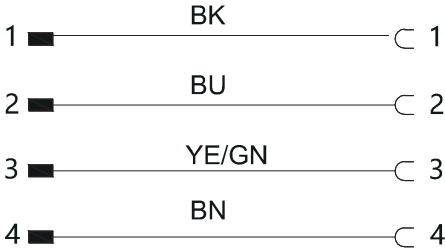
Yellow cable	YE
--------------	----

1	BK
2	BU
3	BN
4	YE/GN

1	BK
2	BU
4	BN
3	YE/GN
5	WH

Circuit

Double end pre cast wire harness
Flange mounting

Product drawing	Hole drawing	Product size	Pins Assignment	
				
				
Material and Length		4core	4core	Circuit
PVC	grey3m	FLH-7/8-M04T(M25)/F04T-3.0PVC/GY		
PVC	grey5m	FLH-7/8-M04T(M25)/F04T-5.0PVC/GY		
PVC	grey10m	FLH-7/8-M04T(M25)/F04T-10.0PVC/GY		
PUR	grey3m	FLH-7/8-M04T(M25)/F04T-3.0PUR/GY		
PUR	grey5m	FLH-7/8-M04T(M25)/F04T-5.0PUR/GY		
PUR	grey10m	FLH-7/8-M04T(M25)/F04T-10.0PUR/GY		
DragChain	grey3m	FLH-7/8-M04T(M25)/F04T-3.0TL/GY		
DragChain	grey5m	FLH-7/8-M04TM25)/F04T-5.0TL/GY		
DragChain	grey10m	FLH-7/8-M04T(M25)/F04T-10.0TL/GY		
Yellow cable	YE			







Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	230/400 V AC/DC	
Rated current	MAX.10A	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~ +85℃	
Cable specification	4G1.5mm²	5G1.5mm²







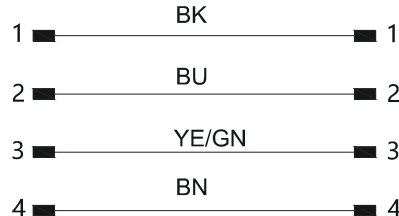


7/8 Connector Harness

Double end pre cast wire harness Flange mounting

Product drawing	Hole drawing	Product size	Pins Assignment
			
			
Material and Length		5core	Circuit
PVC	grey3m	FLH-7/8-M05T(M25)/F05T(M25)-3.0PVC/GY	1 ■ BK 1
PVC	grey5m	FLH-7/8-M05T(M25)/F05T(M25)-5.0PVC/GY	2 ■ BU 2
PVC	grey10m	FLH-7/8-M05T(M25)/F05T(M25)-10.0PVC/GY	3 ■ YE/GN 3
PUR	grey3m	FLH-7/8-M05T(M25)/F05T(M25)-3.0PUR/GY	4 ■ BN 4
PUR	grey5m	FLH-7/8-M05T(M25)/F05T(M25)-5.0PUR/GY	5 ■ WH 5
PUR	grey10m	FLH-7/8-M05T(M25)/F05T(M25)-10.0PUR/GY	
DragChain	grey3m	FLH-7/8-M05T(M25)/F05T(M25)-3.0TL/GY	
DragChain	grey5m	FLH-7/8-M05T(M25)/F05T(M25)-5.0TL/GY	
DragChain	grey10m	FLH-7/8-M05T(M25)/F05T(M25)-10.0TL/GY	
Yellow cable	YE		

Double end pre cast wire harness Flange mounting

Product drawing	Hole drawing	Product size	Pins Assignment
			
			
Material and Length		4core4core	Circuit
PVC	grey3m	FLH-7/8-M04T(M25)/F04T-3.0PVC/GY	
PVC	grey5m	FLH-7/8-M04T(M25)/F04T-5.0PVC/GY	
PVC	grey10m	FLH-7/8-M04T(M25)/F04T-10.0PVC/GY	
PUR	grey3m	FLH-7/8-M04T(M25)/F04T-3.0PUR/GY	
PUR	grey5m	FLH-7/8-M04T(M25)/F04T-5.0PUR/GY	
PUR	grey10m	FLH-7/8-M04T(M25)/F04T-10.0PUR/GY	
DragChain	grey3m	FLH-7/8-M04T(M25)/F04T-3.0TL/GY	
DragChain	grey5m	FLH-7/8-M04TM25)/F04T-5.0TL/GY	
DragChain	grey10m	FLH-7/8-M04T(M25)/F04T-10.0TL/GY	
Yellow cable		YE	

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	230/400 V AC/DC
Rated current	MAX.10A
ProtectionClass(IEC 60529)	IP67
Ambient temperature	-25~+85°C
Cable specification	4G1.5mm ² 5G1.5mm ²







Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM







ISO 9001 (2015) quality management system

7/8 Connector Harness

Double end pre cast wire harness Flange mounting

Product drawing	Hole drawing	Product size	Pins Assignment																																												
																																															
<table border="1"> <thead> <tr> <th>Material and Length</th><th>Score</th><th>Score</th><th>Circuit</th></tr> </thead> <tbody> <tr> <td>PVC grey3m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-3.0PVC/GY</td><td></td><td>1 BK 1</td></tr> <tr> <td>PVC grey5m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-5.0PVC/GY</td><td></td><td>2 BU 2</td></tr> <tr> <td>PVC grey10m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-10.0PVC/GY</td><td></td><td>3 YE/GN 3</td></tr> <tr> <td>PUR grey3m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-3.0PUR/GY</td><td></td><td>4 BN 4</td></tr> <tr> <td>PUR grey5m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-5.0PUR/GY</td><td></td><td>WH</td></tr> <tr> <td>PUR grey10m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-10.0PUR/GY</td><td></td><td></td></tr> <tr> <td>DragChain grey3m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-3.0TL/GY</td><td></td><td></td></tr> <tr> <td>DragChain grey5m</td><td>FLH-7/8-M05T(M25)/M05T(M25)-5.0TL/GY</td><td></td><td></td></tr> <tr> <td>DragChain grey10m</td><td>FLH-7/8-M05T(M25)/F05T(M25)-10.0TL/GY</td><td></td><td></td></tr> <tr> <td>Yellow cable YE</td><td></td><td></td><td></td></tr> </tbody> </table>				Material and Length	Score	Score	Circuit	PVC grey3m	FLH-7/8-M05T(M25)/M05T(M25)-3.0PVC/GY		1 BK 1	PVC grey5m	FLH-7/8-M05T(M25)/M05T(M25)-5.0PVC/GY		2 BU 2	PVC grey10m	FLH-7/8-M05T(M25)/M05T(M25)-10.0PVC/GY		3 YE/GN 3	PUR grey3m	FLH-7/8-M05T(M25)/M05T(M25)-3.0PUR/GY		4 BN 4	PUR grey5m	FLH-7/8-M05T(M25)/M05T(M25)-5.0PUR/GY		WH	PUR grey10m	FLH-7/8-M05T(M25)/M05T(M25)-10.0PUR/GY			DragChain grey3m	FLH-7/8-M05T(M25)/M05T(M25)-3.0TL/GY			DragChain grey5m	FLH-7/8-M05T(M25)/M05T(M25)-5.0TL/GY			DragChain grey10m	FLH-7/8-M05T(M25)/F05T(M25)-10.0TL/GY			Yellow cable YE			
Material and Length	Score	Score	Circuit																																												
PVC grey3m	FLH-7/8-M05T(M25)/M05T(M25)-3.0PVC/GY		1 BK 1																																												
PVC grey5m	FLH-7/8-M05T(M25)/M05T(M25)-5.0PVC/GY		2 BU 2																																												
PVC grey10m	FLH-7/8-M05T(M25)/M05T(M25)-10.0PVC/GY		3 YE/GN 3																																												
PUR grey3m	FLH-7/8-M05T(M25)/M05T(M25)-3.0PUR/GY		4 BN 4																																												
PUR grey5m	FLH-7/8-M05T(M25)/M05T(M25)-5.0PUR/GY		WH																																												
PUR grey10m	FLH-7/8-M05T(M25)/M05T(M25)-10.0PUR/GY																																														
DragChain grey3m	FLH-7/8-M05T(M25)/M05T(M25)-3.0TL/GY																																														
DragChain grey5m	FLH-7/8-M05T(M25)/M05T(M25)-5.0TL/GY																																														
DragChain grey10m	FLH-7/8-M05T(M25)/F05T(M25)-10.0TL/GY																																														
Yellow cable YE																																															

Product drawing	Hole drawing	Product size	Pins Assignment																																												
																																															
<table border="1"> <thead> <tr> <th>Material and Length</th><th>Score</th><th>Score</th><th>Circuit</th></tr> </thead> <tbody> <tr> <td>PVC grey3m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-3.0PVC/GY</td><td></td><td>1 BK 1</td></tr> <tr> <td>PVC grey5m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-5.0PVC/GY</td><td></td><td>2 BU 2</td></tr> <tr> <td>PVC grey10m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-10.0PVC/GY</td><td></td><td>3 YE/GN 3</td></tr> <tr> <td>PUR grey3m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-3.0PUR/GY</td><td></td><td>4 BN 4</td></tr> <tr> <td>PUR grey5m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-5.0PUR/GY</td><td></td><td>WH</td></tr> <tr> <td>PUR grey10m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-10.0PUR/GY</td><td></td><td></td></tr> <tr> <td>DragChain grey3m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-3.0TL/GY</td><td></td><td></td></tr> <tr> <td>DragChain grey5m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-5.0TL/GY</td><td></td><td></td></tr> <tr> <td>DragChain grey10m</td><td>FLH-7/8-F05T(M25)/F05T(M25)-10.0TL/GY</td><td></td><td></td></tr> <tr> <td>Yellow cable YE</td><td></td><td></td><td></td></tr> </tbody> </table>				Material and Length	Score	Score	Circuit	PVC grey3m	FLH-7/8-F05T(M25)/F05T(M25)-3.0PVC/GY		1 BK 1	PVC grey5m	FLH-7/8-F05T(M25)/F05T(M25)-5.0PVC/GY		2 BU 2	PVC grey10m	FLH-7/8-F05T(M25)/F05T(M25)-10.0PVC/GY		3 YE/GN 3	PUR grey3m	FLH-7/8-F05T(M25)/F05T(M25)-3.0PUR/GY		4 BN 4	PUR grey5m	FLH-7/8-F05T(M25)/F05T(M25)-5.0PUR/GY		WH	PUR grey10m	FLH-7/8-F05T(M25)/F05T(M25)-10.0PUR/GY			DragChain grey3m	FLH-7/8-F05T(M25)/F05T(M25)-3.0TL/GY			DragChain grey5m	FLH-7/8-F05T(M25)/F05T(M25)-5.0TL/GY			DragChain grey10m	FLH-7/8-F05T(M25)/F05T(M25)-10.0TL/GY			Yellow cable YE			
Material and Length	Score	Score	Circuit																																												
PVC grey3m	FLH-7/8-F05T(M25)/F05T(M25)-3.0PVC/GY		1 BK 1																																												
PVC grey5m	FLH-7/8-F05T(M25)/F05T(M25)-5.0PVC/GY		2 BU 2																																												
PVC grey10m	FLH-7/8-F05T(M25)/F05T(M25)-10.0PVC/GY		3 YE/GN 3																																												
PUR grey3m	FLH-7/8-F05T(M25)/F05T(M25)-3.0PUR/GY		4 BN 4																																												
PUR grey5m	FLH-7/8-F05T(M25)/F05T(M25)-5.0PUR/GY		WH																																												
PUR grey10m	FLH-7/8-F05T(M25)/F05T(M25)-10.0PUR/GY																																														
DragChain grey3m	FLH-7/8-F05T(M25)/F05T(M25)-3.0TL/GY																																														
DragChain grey5m	FLH-7/8-F05T(M25)/F05T(M25)-5.0TL/GY																																														
DragChain grey10m	FLH-7/8-F05T(M25)/F05T(M25)-10.0TL/GY																																														
Yellow cable YE																																															

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Rated voltage	230/400 V AC/DC
Rated current	MAX.10A
ProtectionClass(IEC 60529)	IP67
Ambient temperature	-25~+85°C
Cable specification	4G1.5mm ² 5G1.5mm ²



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM